

## STARCERAM® AT 1201, 1203

2023.01.24

### SPECIFICATIONS

- ▶ Chemical formula:  $\text{Al}_2\text{TiO}_5$
- ▶ Chemical name: Aluminium titanate
- ▶ Characteristics: Sintered aluminium titanate
- ▶ Description of product: Parts made of aluminium titanate
- ▶ Colour: White

### CHEMICAL CHARACTERISTICS (TYP.)<sup>1,2</sup>


		AT 1201	AT 1203
$\text{Al}_2\text{O}_3 / \text{TiO}_2 / \text{SiO}_2$	[wt%]	> 99	> 99
$\text{Al}_2\text{TiO}_5$	[%]	88	85

### MECHANICAL & PHYSICAL CHARACTERISTICS (TYP.)


		AT 1201	AT 1203
Density	[g/m <sup>3</sup> ]	3.35	3.32
Flexural strength $\sigma_{b4,m}$ (RT) <sup>1</sup>	[MPa]	40	25
	(1,000°C)	60	70
	(1,200°C)	100	80
Comparison strength $\sigma_{ov}$	[MPa]	47	26
Weibull modulus (RT)	[ - ]	40	60
Young's modulus (RT)	[GPa]	16	10
Fracture toughness <sup>2</sup>	[MPa $\sqrt{\text{m}}$ ]	3 - 5	3 - 5
Thermal conductivity (RT)	[W/mK]	1.4	1.4
Thermal conductivity (800 °C)	[W/mK]	1.6	1.4
Thermal expansion CTE (RT-1,000 °C)	[x10 <sup>-6</sup> /K]	1.6	1.25
Hardness (DPH)	[GPa]	5	5
Thermal shock coefficient R1 (calc. value)	[K]	1,500	2,000
Max. working temperature	[°C]	1,000	1,000
Currently applicable up to	[°C]	1,300	1,300

<sup>1</sup> 4-point-bending 40/20 mm

<sup>2</sup> Standardized strength related to effective volume  $V_{\text{eff}} = 1 \text{ mm}^3$  and fracture probability  $F_B = 63,2 \%$

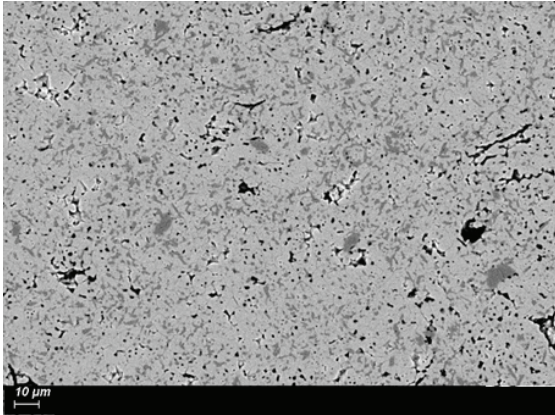**SEM PHOTOMICROGRAPH**

AT 1201, 30 µm, 15 kV, 9.5 mm, 500x

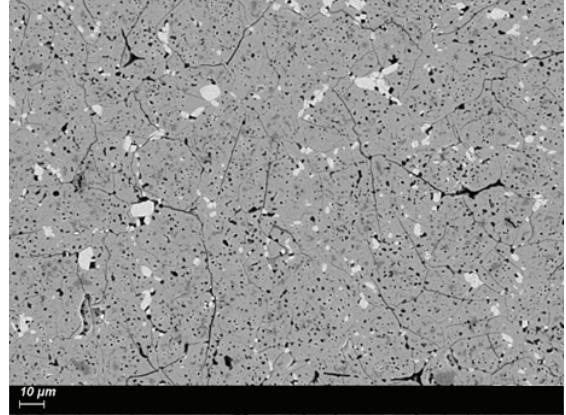

AT 1203, 30 µm, 15 kV, 8.9 mm, 500x

**PACKAGING**

StarCeram® AT products are individually packed, depending on size.  
Packaging acc. to transport regulations.

**STORAGE & HANDLING**

Handle with care! Ceramic products may break if not treated properly. Storage and handling are subject to the rules and regulations in the country of use.

**HAZARDS IDENTIFICATION IN ADVERTISING (REGULATION (EC) NO 1272/2008 ARTICLE 48)**

none

**DOCUMENTATION**

An inspection document in accordance with EN 10204 is supplied with every shipment.

The information contained herein, and in particular the recommendations relating to the application and end-use of our products, are given in good faith based on our current knowledge and experience. The information do not constitute a guarantee with respect to properties of the products. Since we have no control over the application modalities, no guarantee is granted with respect to merchantability or fitness for a particular purpose. It is your sole responsibility to validate the suitability and completeness for your own use. We therefore recommend to always perform a test according to specific circumstances. Any liability in respect of the information in this data sheet or any other written or oral recommendation(s) regarding the concerned product is excluded, except if otherwise explicitly agreed and except in case of death or personal injury, intent or gross negligence and under any applicable mandatory product liability law. Technical data are subject to change without notice. The newest version of the technical data sheet replaces all preceding versions. The trademarks, trade names, logos and other designations of origin contained in this data sheet are registered and unregistered intellectual property rights of KYOCERA Fin ceramics Europe GmbH. It is forbidden to copy or use information from this data sheet in whole or in part, especially in dealings with third parties.